

GALAXY® GX2 Automated Test System

Simplicity Counts



*Because every life has a **purpose**...*

Advanced MSA Link Pro Software: Analyze All Data. Any Time

MSA Link Pro Software lets you easily and proactively manage your gas detection fleet. Program offers efficient setup and configuration with dashboard alerts as to all conditions, as well as calibration gas and expiration warnings. Query data, print or save reports including gas exposures incidents; system can be set up to automatically send email exposure alerts. Generate session logs, including periodic as well as calibration and GALAXY GX2 System bank data. Program sends scheduled emails from master test stand based upon detector conditions and events. Directly input your data and filter results live.

View test and exposure data, session and periodic logs at a glance. Dashboard displays live status of GALAXY System test stand banks.

Instruments

Calibration failed: 0
Calibration overdue: 0
Bump test failed: 0
Bump test overdue: 0

GALAXY GX2

Gas Cylinders Low: 0, Empty: 0
Gas Cylinders Pending: 0, Expired: 0
General errors: 0
Connection lost: 0

Gas Detector Alarms - History

Today (Thursday, August 02, 2012)

High alarm: 0, STEL: 0
Low alarm: 0, TWA: 0

Live filtering can be viewed, printed and saved as PDF document.

session log session alarm log periodic log calibration GALAXY GX2

No searches defined

DATE RANGE

Yesterday
 Last Week
 Last Month
 Last 6 Months
 Last Year
 Custom

DEVICES

All Devices
 ALTAIR
 ALTAIR PRO
 ALTAIR 4
 ALTAIR 4X
 ALTAIR 5
 ALTAIR 5 SR
 ALTAIR 5K
 ALTAIR 5K SR

Timestamp	Device Type	Serial Number	Event Type	Gas	Alarm Value	Gas Unit
7/3/2012 8:07:00 AM	ALTAIR 4X	59161	Exposure Peak	Carbon Monoxide	63.00000000	ppm
7/3/2012 8:07:00 AM	ALTAIR 4X	59161	Exposure Peak	Oxygen	15.30000022	%vol
7/3/2012 8:07:00 AM	ALTAIR 4X	59161	Exposure Peak	Pentane	58.00000000	% LEL
7/3/2012 8:10:00 AM	ALTAIR 4X	59161	Exposure Peak	Nitrogen Dioxide	10.20000015	ppm
7/3/2012 8:09:00 AM	ALTAIR 4X	3	Exposure Peak	Oxygen	15.50000023	%vol
7/3/2012 8:08:00 AM	ALTAIR 4X	3	Exposure Peak	Carbon Monoxide	63.00000000	ppm
7/3/2012 8:09:00 AM	ALTAIR 4X	3	Exposure Peak	Pentane	58.00000000	% LEL
7/3/2012 8:12:45 AM	ALTAIR 4X	3	Exposure Peak	Nitrogen Dioxide	10.90000016	ppm
7/3/2012 8:34:45 AM	ALTAIR 4X	3	Exposure Peak	Carbon Monoxide	62.00000000	ppm
7/3/2012 8:34:45 AM	ALTAIR 4X	3	Exposure Peak	Pentane	61.00000000	% LEL
7/3/2012 8:34:45 AM	ALTAIR 4X	3	Exposure Peak	Oxygen	15.50000023	%vol
7/3/2012 8:37:15 AM	ALTAIR 4X	3	Exposure Peak	Nitrogen Dioxide	5.90000008	ppm
7/3/2012 8:38:15 AM	ALTAIR 4X	3	Exposure Peak	Nitrogen Dioxide	11.50000017	ppm
7/3/2012 8:33:30 AM	ALTAIR 4X	59161	Exposure Peak	Pentane	58.00000000	% LEL
7/3/2012 8:33:30 AM	ALTAIR 4X	59161	Exposure Peak	Oxygen	15.30000022	%vol
7/3/2012 8:33:30 AM	ALTAIR 4X	59161	Exposure Peak	Carbon Monoxide	61.00000000	ppm
7/3/2012 8:36:00 AM	ALTAIR 4X	59161	Exposure Peak	Nitrogen Dioxide	10.20000015	ppm

General Settings

Bank Name: betalery
Language: English
Pressure Unit: Bar PSI

Calibration & Bump Test

Testmode:
Calibration Interval (Days):
Bump Test Interval (Days): 1
Classic Mode:

Data Log

Download Session Log:
Download Periodic Log:
Erase Data Log:

Alternate LEL Setup

Gas: Methane Alternate LEL Allow Simulant

MSA The Safety Company

GALAXY GX2 Test Report Test Date/Time: 21 May 2012 02:57:08 PM

Test Type: Calibration
Test Result: Passed
GX2 S/N: 1
Company: Company

Instrument: ALTAIR 4X
Serial Number: 14
User: SAM
Department: ENG

Instrument Set Points:

Sensor	Low	High	STEL	TWA	Range
COMB	10 % LEL	20 % LEL	0 % LEL	0 % LEL	0-100 % LEL
O2	19.5 %vol	23 %vol	0 %vol	0 %vol	0-30 %vol
CO	25 ppm	100 ppm	100 ppm	25 ppm	0-2000 ppm
H2S	10 ppm	15 ppm	15 ppm	10 ppm	0-200 ppm

Test Results:

Sensor	Target Value	Found Value	Test Result	Notes
COMB	58 % LEL	58 % LEL	Passed	Methane as % LEL Pentane

System offers direct data input, live filtering, test and exposure queries, and detailed reports.

Print and save detailed calibration, bump test and exposure reports

Simplicity Counts

GALAXY GX2 Automated Test System / Advanced Safety Management . . . Effortless Operation

The new GALAXY GX2 Automated Test System provides simple and intelligent testing and calibration of MSA

ALTAIR® and ALTAIR PRO Single-Gas Detectors, as well as ALTAIR 4X and ALTAIR 5X Multigas Detectors, driven by the most advanced technology available in any portable gas detector: MSA XCell® Sensors.

This easy-to-use automated test stand offers high performance as either a stand-alone unit or an integrated portable detector management system, enabling total data access and control of MSA's ALTAIR Gas Detector fleet. Once any ALTAIR Family Gas Detector is placed within the GALAXY GX2 System, it can be tested, calibrated and charged automatically.* Flexibility allows for up to 10 test stations, four cylinder holders and multi-unit charger within one GALAXY GX2 System detector bank.

** Contact your local sales representative regarding availability.*



Ease of Use: Calibrate & Test Effortlessly

- Easy setup, simple use with touch-free testing.
- Color touch screen enhances user experience at the test stand.
- Can be used with a PC or as a stand-alone system, the perfect solution for large fleet end users, as well as for smaller applications.
- Automated test system and MSA Link™ Software (transfers portable gas detector records to a connected PC) provided as standard in many commonly spoken languages.
- Your ALTAIR 4X and ALTAIR 5X Multigas Detectors are always ready for use.*
If you're faced with an urgent, short-notice situation, these units are ready for deployment, ideal for emergency applications.

Cost of Ownership: Save Time, Save Gas & Save Money

- Exceeds 50% reduction in cost of ownership, including calibration gas expenses when combined with high-performance MSA XCell Sensors.
- Faster total testing of ALTAIR Family Gas Detectors.
- Test up to 10 gas detectors simultaneously in the time most competitive systems take to test one device.
- RFID-tagged calibration gas cylinders to help ensure use of correct gas.

The MSA Commitment


From the latest in sensor technology to instrument design and manufacturing, MSA has the capabilities and expertise to support your portable gas detection challenges.

Proactive Safety: Command, Control, Configure

- With MSA Link Pro Software, proactively manage safety by addressing gas exposure information and missing or failed calibrations and bump tests.
- Calibration gas and expiration warnings provided by the GALAXY GX2 System and via advanced MSA Link Pro Software.
- Print calibration stickers for gas detectors to provide easy and fast user information.
- Query the system for gas exposures, and then email responses to users.


Color touch screen for ease of setup and viewing; no touch operation is needed to calibration or bump test

Clear and intuitive navigation via large touch buttons and scrolling arrows. When test completes, users view results on test stand popup screen and detailed information on PC dashboard.

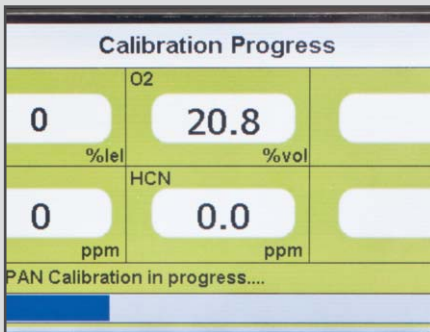

RFID automated calibration gas setup, status alerts and traceability

Gas cylinder information necessary for successful calibration is automatically entered when using RFID-tagged gas cylinders, providing users with exceptionally easy setup. Onscreen gas cylinder pressure gauge shows multiple cylinder status simultaneously.

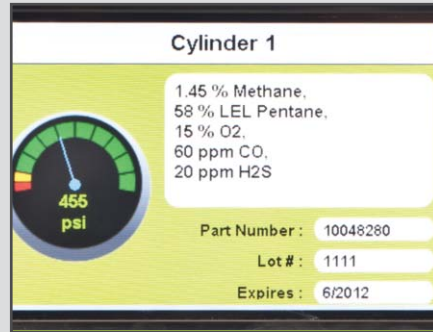

Visual indicators on GALAXY GX2 System and software

Status at a glance is provided through various light indicators: test stand pass/fail LED, charging progress LEDs on multi-unit charger and lighted cylinder band on electronic cylinder holder for low gas and expiration date warning display.



MSA Link Pro and MSA Link Software

Redesigned software interface offers efficient setup; configure every detector's set points quickly and save settings. Overdue calibration and bump test email notifications are delivered via MSA Link Pro Software and an active network connection. Master test stand sends scheduled emails based upon detector conditions and events.



Global platform – Many language options

18 languages are available to serve customers globally. Easily change languages via onscreen menu. Languages chosen other than English are those most widely spoken.



Significant cost of ownership reduction

System offers more than 50% reduction in cost of ownership including calibration gas expenses when used with high-performance MSA XCell Sensors, resulting in faster total testing of ALTAIR Family Gas Detectors.



Simultaneous testing of up to 10 gas detectors

Calibrate up to 10 gas detectors simultaneously in less time than it takes most competitive units to test one. Patented gas flow process increases pressure from demand flow regulator to deliver consist gas flow from one to 10 units. Connect up to 10 test stands and four cylinder holders to perform simultaneous tests.



Securely configure gas detectors at the touch of a button

The GALAXY GX2 Automated Test System allows users to configure many gas detector and cylinder settings at the test stand, settings that can be saved to a reusable file. Settings are stored on a digital-secure USB; no gas detector setting files are stored locally.

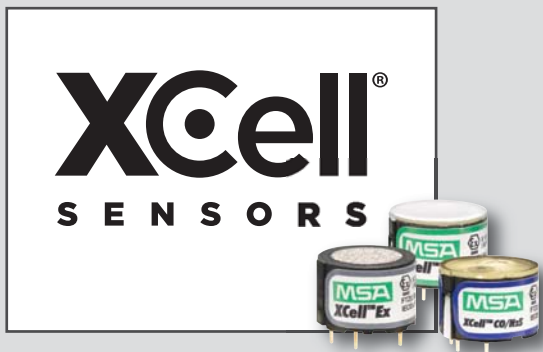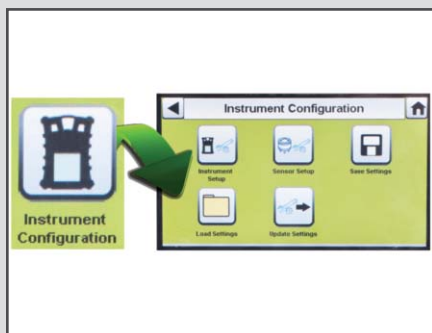

MSA XCell Sensor Technology

The GALAXY GX2 Automated Test System is optimized for use with MSA's high performance XCell Sensors. Sensors offer end-of-sensor-life warning, typical life greater than four years for combustible, O₂, CO/H₂S, and SO₂ sensors and greater than three years for NH₃ and Cl₂ sensors. Bump test in less than 15 seconds, span calibration time of 60 seconds and sensor response and clear times in less than 15 seconds for most common sensor configurations.

Your MSA multigas detectors are always ready for use*

Your ALTAIR 4X and ALTAIR 5X Multigas Detectors are available to use immediately. If you're faced with an urgent, short-notice situation, these units are ready for deployment, ideal for emergency applications.



* Contact your local sales representative regarding availability.

GALAXY GX2 System Ordering Information

GALAXY GX2 SYSTEM TEST STAND				
	1 VALVE (for use with 1 calibration gas cylinder)		4 VALVE (for use with 1-4 calibration gas cylinders)	
	Charging*	No-charging	Charging*	No-charging
ALTAIR /ALTAIR PRO SINGLE-GAS DETECTOR	–	10128644	–	10128643
ALTAIR 4/4X MULTIGAS DETECTOR	10128630	10128642	10128629	10128641
ALTAIR 5/5X MULTIGAS DETECTOR	10128626	10128628	10128625	10128627

*Contact your local sales representative regarding availability.

The GALAXY GX2 System test stand comes with pre-configured plugs, barbs, fresh air filter, power supply with corresponding plug, spare parts kit (gas tubing, barbs and plugs), Ethernet cable (short cable for connection between test stands), and screen protector. Please see ordering information below for further system components, including electronic cylinder holder (includes regulator) or non-electronic cylinder holder (without regulator), MSA Link Pro Software, digital secure USB key, end cap, and multi-unit charger.

ACCESSORIES	
P/N	Description
10105756	Electronic cylinder holder
10125135	Non-electronic cylinder holder
10127111	4 GB SD card
10123938	MSA Link Pro Software key
10123937	Digital secure USB key
10125907	End cap
10127422	ALTAIR 4/4X Detector Multi-unit Charger, NA
10127427	ALTAIR 5/5X Detector Multi-unit Charger, NA
10127112	Laminated quick start guide
10127518	12" (TBR) Ethernet cable for test stand to test stand connection
10126657	DIN rail clip kit (2 clips & screws per kit)
10062364	Type Omega DIN Rail 0.5m, perforated, steel, zinc-plated
10062365	Type Omega DIN Rail 1m, perforated, steel, zinc-plated
10062366	Type Omega DIN Rail 2m, perforated, steel, zinc-plated
10082834	USB IR dongle (for use with MSA Link Software)
10034391	Demand flow regulator (universal)
710289	Large capacity (<3000 psi) demand regulator
10126268	Vehicle power adapter
10127808	Sticker or receipt / sticker printer
10126437	Detector sticker label roll
10126138	Receipt & sticker label roll
10145138	Printer ribbon

CALIBRATION GAS	
P/N	Description
10048280	Calibration gas cylinder (34L) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S
10045035	Calibration gas cylinder (54L) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S
10117738	Calibration gas cylinder (58L) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S, 10 ppm SO ₂
10098855	Calibration gas cylinder (34L) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S, 10 ppm SO ₂
10103262	Calibration gas cylinder (58L) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S, 2.5% CO ₂

SPECIFICATIONS		
OPERATING TEMPERATURE	GALAXY GX2 System	0-40 °C
POWER INPUT	Power module	100-240 VAC, 47-63 Hz
	Optional vehicle module	9-32 VDC
PHYSICAL CHARACTERISTICS	Test stand	Height: 11.80" (299.72 mm)
		Width: 6.50" (165.10 mm)
		Depth: 7.90" (200.66 mm)
		Material: acrylonitrile butadiene ABS
	Cylinder holder	Height: 11.80" (299.72 mm)
		Width: 6.50" (165.10 mm)
		Depth: 6.10" (154.94 mm)
		Material: acrylonitrile butadiene ABS
	Multi-unit charger	Height: 11.80" (299.72 mm)
		Width: 6.50" (165.10 mm)
		Depth: 6.44" (163.58 mm)
		Material: acrylonitrile butadiene ABS

Authorised distributor

In Australia:

For customer service, call 1300-735-292
 To fax an order, use 1800-067-639
 To email an order, ordersau@thermofisher.com

In New Zealand:

For customer service, call 0800-933-966
 To fax an order, use 0800-329-246
 To email an order, ordersnz@thermofisher.com

ThermoFisher
 SCIENTIFIC