# Polypropylene Vertical PRO Laminar Clean Bench



TopAir provides high-quality, safe Vertical Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.


In vertical benches, the filtered air is channeled downwards through a filter installed at the top of the bench. All components are produced by leading global companies, such as AAF USA.

#### **Advanced Operation System:**

- 7" screen with air velocity display
- Automatic air velocity control
- Hour timer for filter
- Filter replacement alarm

**Red Light Alert:** Whenever there is an air velocity failure, a red light inside the unit switches on and the system light automatically switches off. This enables convenient detection of failures from a distance, even by hearing-impaired people.

- Vertical air stream producing clean air in compliance with ISO5/ CLASS100 or ISO4/Class10 standards (depending on the filter installed
- Polypropylene structure with high chemical resistance
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- 7" screen with air velocity display
- Automatic configuration for air velocity
- High efficiency quiet EC fan
- Metal stand
- Front window
- UV light
- Universal electrical outlet
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO 14644-1 / CE

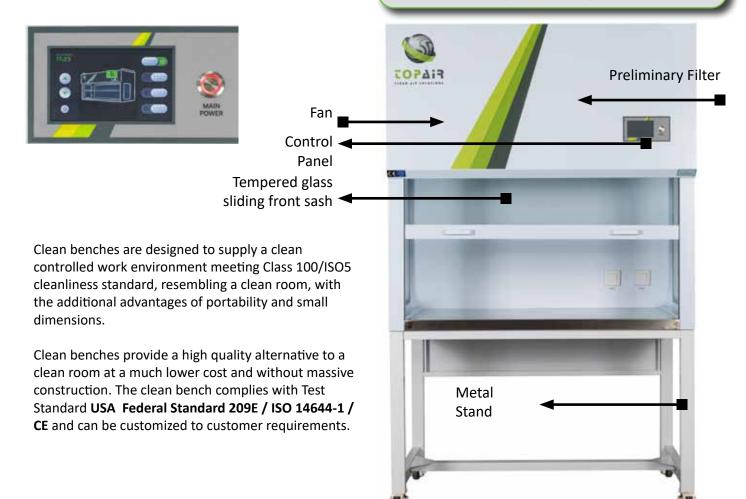

## **Models**

Spec/Model	HC-V090PP-PRO	HC-V120PP-PRO	HC-V150PP-PRO	HC-V180PP-PRO		
Outer Dimensions	900 x 850 x 1320 mm	1200 x 850 x 1320 mm	1500 x 850 x 1320 mm	1800 x 850 x 1320 mm		
WxDxH	35.4 x 33.4 x 51.9"	47.2 x 33.4 x 51.9"	59 x 33.4 x 51.9"	70.8 x 33.4 x 51.9"		
WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS						
Workspace	770 x 700 x 750 mm	1070 x 700 x 750 mm	1370 x 700 x 750 mm	1670 x 700 x 750 mm		
(W x D x H)	30.3 x 27.5 x 29.5"	42.1 x 27.5 x 29.5"	53.9 x 27.5 x 29.5"	65.7 x 27.5 x 29.5"		
Test Standard	USA Federal Standard 209E / ISO-14644-1, CE					
Air Velocity m/s	0.3 m/s, 60 FPM					
Cleanliness in Workstation	Class-100 (FS 209E) ISO 4, ISO-14644-1					
Hood Material	Polypropylene					
Work Table Material	Stainless steel SUS 304					
Noise (Tested 20 cm from the work table, 1.2m above ground)	<52dB	<54dB	<56dB	<56dB		
Power Supply	110 / 220V, 50/60 Hz, Single phase					
Illumination	800 LUX LED lighting					
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)					

# **Accessories**

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

### Authorised distributor



For customer service, call 1300-735-292 To email an order, ordersanz@thermofisher.com To order online: thermofisher.com

#### In New Zealand:

For customer service, call 0800-933-966 To email an order, ordersanz@thermofisher.com To order online: thermofisher.com

