



Technical Data Sheet



Revco Ultra-Low Temperature Chest Freezer

MODEL RELEASE - 20

Thermo Fisher Scientific, Marietta, Ohio

| Specifications | Model Number |
|---|--|
| | ULT1790-10-D |
| Application, Rating and Electrical Data | |
| Application | Storage of General (non-flammable) Laboratory Materials |
| Storage Volume | 481.4 Liters/17 Cubic Feet |
| Temperature Rating | -50°C to -86°C |
| Electrical Power | 208-230V 60 Hz, 1 Phase |
| Instrument Rated Current | 12.0 AMP |
| Building Supply Rating | 15.0A (min) dedicated grounded circuit. Protected by circuit breaker rated for inductive loads |
| Power Plug/Power Cord Length | NEMA 6-15P for D / IEC Cords, 10 Feet (3.048 Meters) |
| Agency Listings | UL, cUL, CE, FDA |
| Indoor/Outdoor Usage | Indoor Use Only |
| Application Environment | Non-Corrosive, Non-Flammable, Non-Explosive, Good Air Ventilation, 15° C - 32° C (59° F - 90° F) |
| Refrigeration Configuration | |
| Refrigeration System | Industrial-Rated Two Stage Cascade System |
| Compressor / Number | Hermetic Compressor for Low Temperature Application / 2 |
| Compressor Capacity* | 1000 W |
| Condenser Type/Number | Enhanced Finned-Tube and Forced-Air Cooled / 1 |
| Expansion Device | Capillary Tube |
| Evaporator Type | Cold Wall With Enhanced Heat Transfer Treatment |
| Defrost Method | Manual Defrost |
| Refrigerant Charge/Flammability | R404A in 1st Stage / R508B+R290 Mix in 2nd Stage / Non-Flammable |
| Controller/Electrical System Configuration and Features | |
| Controller Level | Top |
| Power Switch | On-Off with Circuit Breaker |
| Controller Type | Microprocess Control |
| Setpoint Security | Yes |
| Compressor Safe Guard | High Pressure Cutout Switch/High Temp Cutout Switch/Current protection/Logic protection |
| Control Sensor | Single RTD (1000 ohm Platinum RTD) |
| Remote Alarm Terminals | RS485, 4-20mA, Dry Contacts |
| Adjustable Warm/Cold Alarms | Fully Adjustable |
| Auto-Voltage Safeguard | Buck/Boost System |
| Dimensions and Construction | |
| Interior Dimensions (H x D x W) | 706 H x 470 D x 1473 W mm (27.8 H x 18.5 D x 58 W in.) |
| Exterior Dimensions (H x D x W) | 1031 H x 829 D x 2225 W mm (40.6 H x 32.7 D x 87.6 W in.) |
| Shipping Dimensions | 1168 H x 973 D x 2677 W mm (46 H x 38.3 D x 105.4 W in.) |
| Insulation | High Density Polyurethane Foam, R-30 (ft ² ·°F·hr/Btu) |
| Door Seal | Silicone-Based High Performance Seal Gasket |
| Shelves / Capacity | N/A |
| All-Direction Casters | Standard with Locks |
| Unit Weight | Approximately 349 kg / 771 lbs. |
| Other Options | Electronic Recorder and CO ₂ or LN ₂ Back-Up System |

Typical Performance Characteristics in 25 ° C Ambient

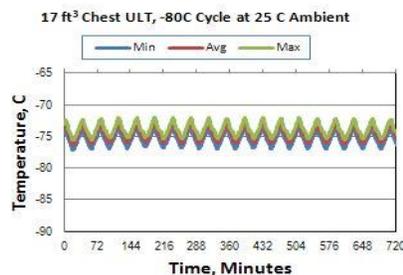
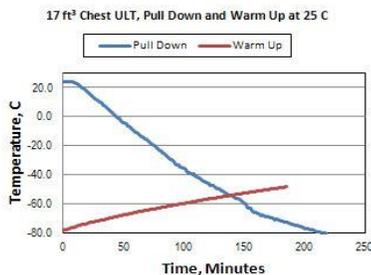


| | |
|--|---------------|
| Test Unit Series or MSO Number: | 18828-E-E |
| Avg Cabinet Temp at -80 ° C Cycle (C): | -74.6 |
| Peak Variation from Setpoint (C): | + 7.9 / + 2.9 |
| Average Uniformity (C): | 1.5 |
| Average Stability (C): | 3.6 |
| Duty Cycle at -80C Setpoint (%): | 49.4% |
| Cycle (on/off) rate at -80C (min): | 19 / 20 |
| Avg. energy consumption (kW-hr/day): | 11.9 |
| Avg. heat rejection rate (Btu/hr): | 1689 |
| Overall Pulldown Time (to -80C) (hrs): | 3.6 |
| Warmup Time (-80 to -50 C) (minutes): | 185 |
| BTU Capacity at -80C Setpoint (BTU/Hr) | 212 |

- Performance is nominal and individual units may vary.
- Freezer performance will differ due to product amount, product size and operating conditions.
- Continuous product enhancements may, without notice, result in amendments or omissions to this specification. Thermo Scientific cannot accept responsibility for damage, injury, loss or expenses resulting from misapplication of the information herein.



* Manufacturer measured compressor capacity taken at standard -23°C/49°C (Evap/Cond) condition.

© 2018 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

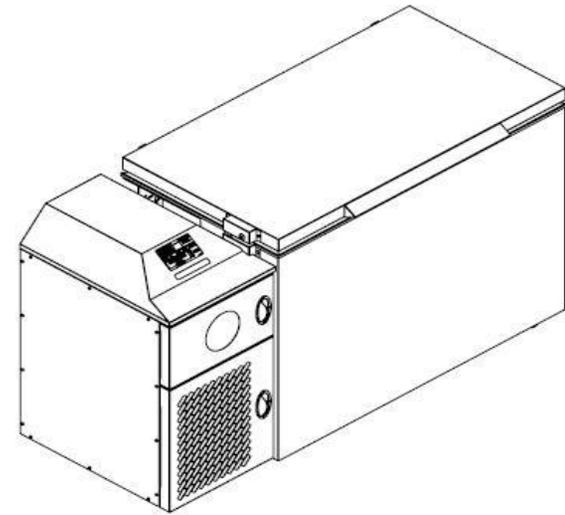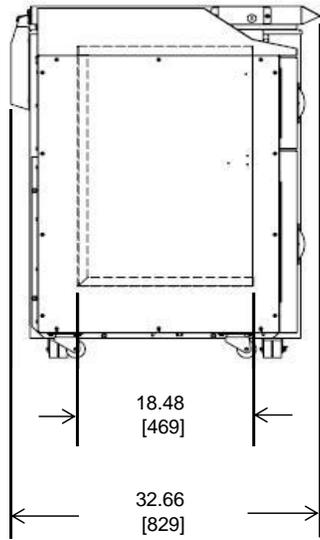

OPTIONAL BACKUP SYSTEM CONNECTOR

POWER LABEL & SWITCH

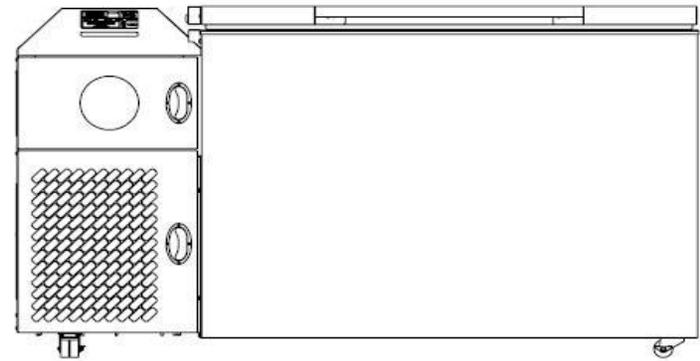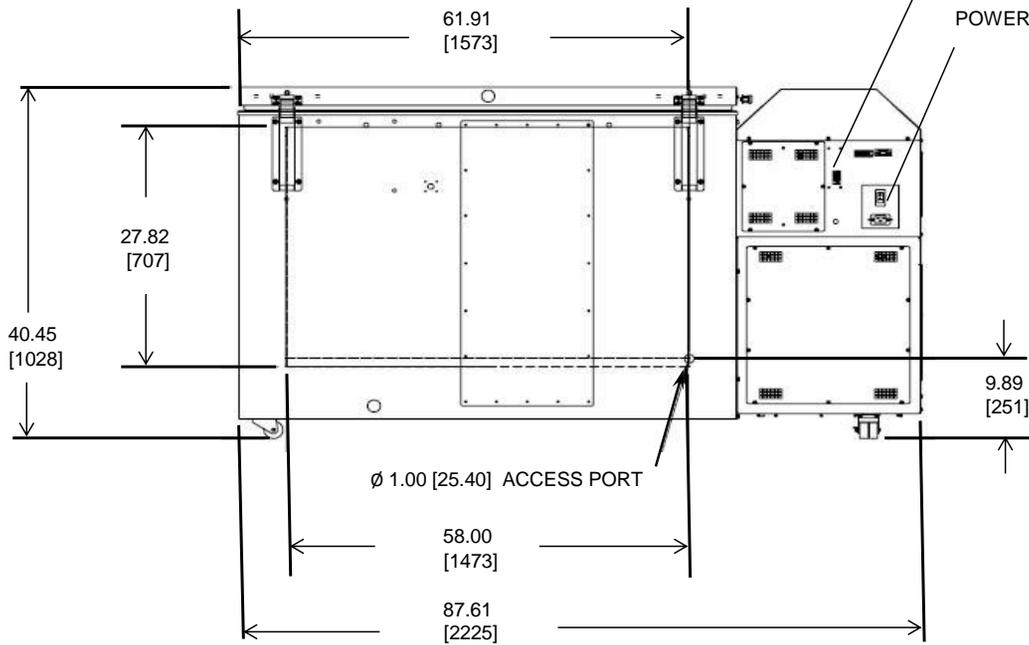

thermo
scientific

17 cuft Chest Freezer

NOTE: DUAL DIMENSION IS INCH OVER METRIC
DO NOT USE FOR ENGINEERING PURPOSES. SUBJECT TO CHANGE WITHOUT NOTICE.