



# Heratherm Microbiological Incubators

Safe, easy and efficient

# Heratherm Microbiological Incubators

Each of our new laboratory incubators is designed with sample protection as top priority.

Thermo Scientific™ Heratherm™ Microbiological Incubators are available in four models, providing three incubator airflow technologies in a choice of six sizes.



- Thermo Scientific™ Heratherm™ Compact Microbiological Incubator
- Thermo Scientific™ Heratherm™ General Protocol Microbiological Incubator
- Thermo Scientific™ Heratherm™ Advanced Protocol Microbiological Incubator
- Thermo Scientific™ Heratherm™ Advanced Protocol Security Microbiological Incubator



Heratherm microbiological incubators family includes optional stainless steel models. All units are cCSAus marked.


# Safe, easy, efficient

Discover why laboratories across the globe rely on Thermo Scientific products every day

Successful incubation is dependent upon the environmental conditions. As such, you need to trust that your valuable samples are maintained in a safe and efficient manner.

Heratherm microbiological incubators are designed to provide long-term performance with optimal conditions – and are backed by a two-year warranty on parts and labor, enabling confidence for your investment.\*

- View of samples through internal glass door, without impact on temperature
- Exceptional temperature uniformity
- Containment with automatic overtemperature alarm
- Alarm for temperature deviations
- Easy temperature setting with intuitive user interface
- Easy to remove shelf system
- Easy to clean interior with rounded corners
- Easy to read large display
- Efficient small footprint to optimize laboratory space
- Efficient utilization of interior with flexible shelf system
- Conveniently stackable without the need for tools or stacking kits\*\*

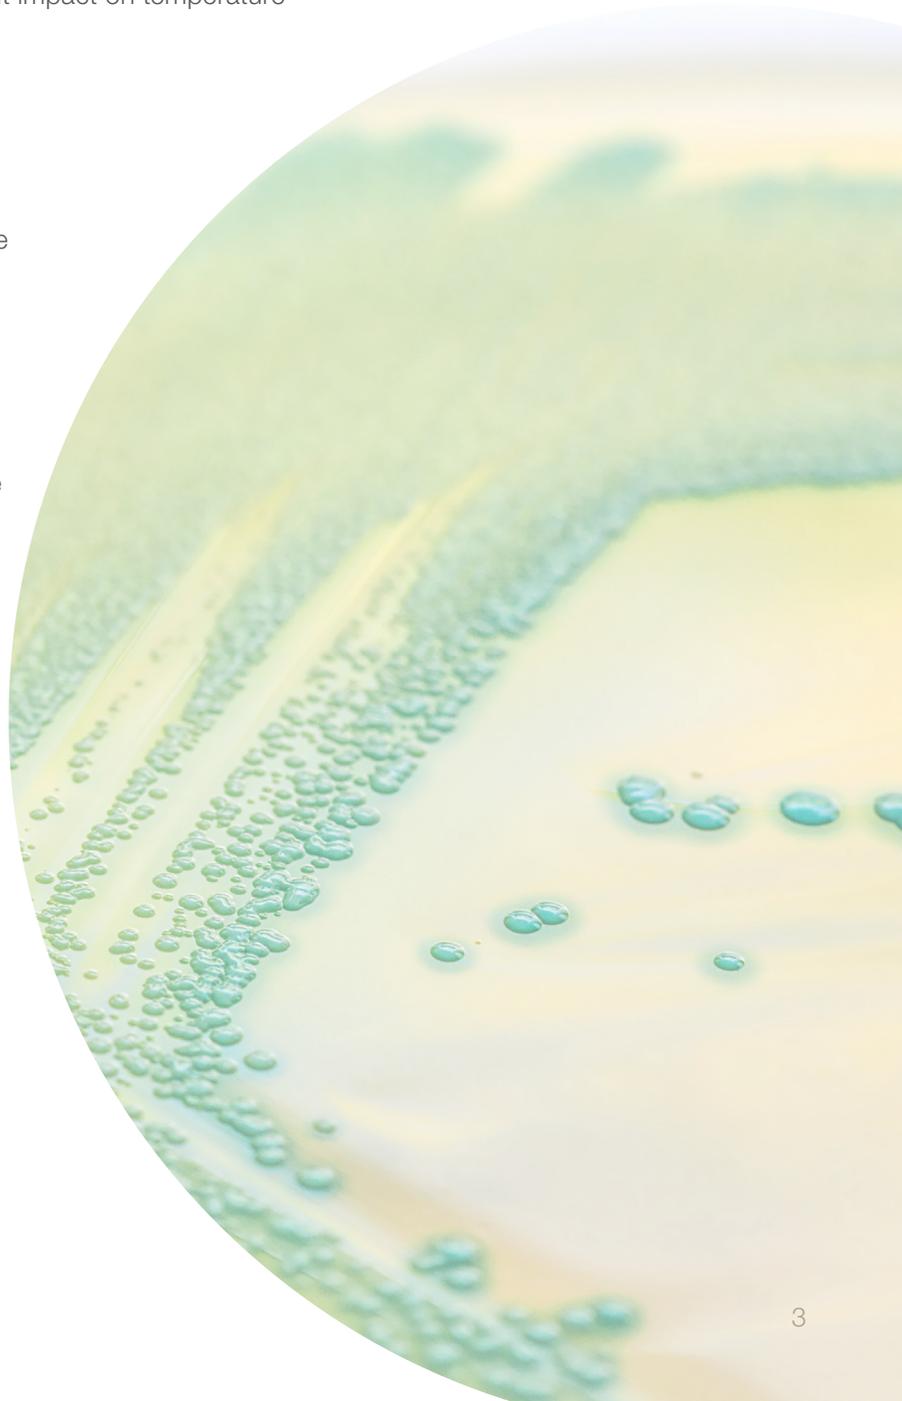

\* Subject to Thermo Fisher Scientific Standard Limited Warranty. See [www.thermoscientific.com](http://www.thermoscientific.com) or product literature for details.

\*\*Optional stacking kit only required if decon cycle or oven is used below or for stacking different sizes.

# Innovative technology for outstanding versatility



FEATURES	Compact incubator	General protocol incubators		Advanced protocol incubators	Advanced protocol security incubators	
	Table top	Table top	Large capacity	Table top	Table top	Large capacity
Temperature range	17 - 50 °C	ambient +5 °C - 75 °C		ambient +5 °C - 105 °C	ambient +5 °C - 105 °C	
Convection technology	Mechanical	Gravity		Dual	Dual	Mechanical
Fan speed adjustable	•	•		6 speeds	6 speeds	gentle / fast
Rounded corners	✓	✓		✓	✓	
Microprocessor control	✓	✓		✓	✓	
Automatic overtemperature alarm (audible and visual)*	•	✓		✓	✓	
Access port	•	✓		✓	✓	
Stackable	•	✓	•	✓	✓	•
Stainless steel interior	•	AISI 430		AISI 304	AISI 304	
RS232 interface	•	✓		✓	✓	
Internal glass door	•	✓		✓	✓	
Easy calibration routine	✓	✓		✓	✓	
Timer functions	•	On / Off		choice of weekly/ hourly/ real time	choice of weekly/ hourly/ real time	
Dry alarm contact for connection of alarm device	•	•		✓	✓	
Optional stainless steel exterior	•	•		•	✓	
Certified decontamination cycleup	•	•		•	✓	
Automatic undertemperature alarm	•	•		•	✓	
Door alarm	•	•		•	✓	
Lockable door	•	•		•	✓	
Connection for optional sample temperature sensor	•	•		•	✓	

\*Class 3.1 overtemperature protection, just without the hassle of setting manually. Note: All units have doors with 180° door opening for easy access.

## Three airflow technologies

### 01

#### Gravity convection

provides gentle airflow, with minimized drying out of samples. An exceptional choice for applications with open plates or open containers.

### 02


#### Mechanical convection

provides temperature uniformity and stability to help ensure an optimal environment for your samples. Fan enables fast recovery time after opening the door. A mechanical convection incubator can even be used for drying applications at high temperature settings – eliminating the need for an additional oven.

### 03

#### Dual convection

is a unique technology which allows the operator to choose the fan speed – from 0% (which equals gravity convection) up to 100%. Depending on the application, the speed can be adapted to provide optimal airflow for your valuable samples. Even at 0% fan speed, temperature uniformity and stability are great.

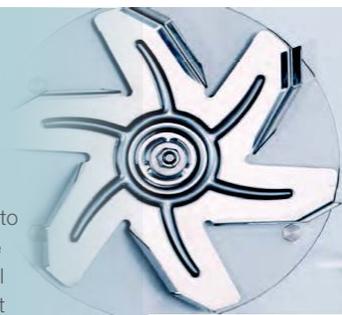

# Select the right model for your needs

Application	Material/solution	Sample requirements	Recommended solution
Bacterial research	Bacteria	Temperatures between 30°C and 70°C	
Microbiology	Microorganisms, cells	Temperatures between 30°C and 70°C	General Protocol, Advanced Protocol or Advanced Protocol Security for highest temperature accuracy, and time control
Coliform determination	Bacteria	Temperature around 37°C	
Histology	Tissue	Temperature around 37°C	
Paraffin embedding	Paraffin	Temperatures of 37°C to around 50°C	
Egg incubation	Eggs	Temperature around 37°C	General Protocol, Advanced Protocol or Advanced Protocol Security for highest temperature accuracy, and time control
Heated storage	Media, samples	Temperature depends on material and specific application – between 30°C and 105°C	General Protocol for temperatures up to 75°C, Advanced Protocol or Advanced Protocol Security for highest temperature accuracy, and time control – up to 105°C
Gene cloning	Bacteria, cells	Temperature around 37°C	Advanced Protocol for highest temperature accuracy and time control Advanced Protocol Security with additional safety features for peace of mind
Pharmaceutical stability testing	Various	Temperatures of 37°C up to 105°C	
Food and beverage testing	Various	Temperatures of 37°C up to 105°C	
BOD/water pollution testing	Water	Temperature around 20°C	Compact
Yeast growth	Yeast	Temperatures between 10°C and 37°C	General Protocol for temperatures above ambient +5°C
Hatching of insects, fish	Insects	Temperature near or below ambient	Advanced Protocol or Advanced Protocol Security for highest temperature accuracy or Compact for temperatures as low as 17°C.  For lower temperatures check the Heratherm refrigerated models at <a href="http://www.thermoscientific.com/incubators">www.thermoscientific.com/incubators</a>

## Footprint comparison\*

## Maximized space efficiency



Making best use of valuable space in your lab, Heratherm microbiological incubators are designed with a very small footprint ratio compared to the interior volume. In addition they are stackable without the need of any tools or stacking devices.\*\*

manufacturer A  
manufacturer B



# Heratherm Compact Microbiological Incubator

The most compact unit of the Heratherm Microbiological Incubator family has an 18 L capacity, ideal for a personalized workspace



Heratherm Compact  
Microbiological Incubator, 18 L

## Smart solution use for Campylobacter testing for small volume applications

- Minimal footprint for space restricted lab areas and mobile use, for e.g. for veterinary care
- Broad temperature range for e.g. yeast growth (at 25 °C), microbiological incubation (at 37 °C), storage (at defined temperature)
- Temperatures from below ambient (as low as 17 °C) up to 50 °C
- Energy consumption is as low as 14 W (at 37 °C), due to energy efficient Peltier technology
- Easy calibration routine for high temperature accuracy
- Internal light facilitates sample observation

## Use for Campylobacter testing

Campylobacter species have been identified as the second most common cause of foodborne illness in the U.S. behind Salmonella, and number one cause of foodborne diarrhea in Europe.

Effective testing methods for diagnosis and treatment require culturing the bacteria at 41.5° to 42°C. The use of anaerobe jars or gas packs is recommended, since low oxygen conditions improve the growth.



Easy to use interface

Order numbers	50125590	50140500
Model	IMC18	IMC18 with door cover
Convection technology	Mechanical convection	
Temperature range (°C)	17 °C to 50 °C	
Spatial temperature deviation (at 37 °C)	± 1.2 °C	
Temperature deviation over time (at 37 °C)	± 0.2 °C	
Footprint (m <sup>2</sup> / sqft)	0.12 / 1.3	
Chamber volume (L / cuft)	approx. 18 / 0.65	
Chamber dimensions (mm / in (W x H x D))	180 x 310 x 290 / 7.1 x 12.2 x 11.4	
Exterior dimensions (mm / in (W x H x D))	260 x 415 x 470 / 10.2 x 16.3 x 18.5	
Number of shelves (standard / max)	2 / 3	
Max. shelf load (kg / lb)	2 / 4.4	
Rated voltage / frequency (V / Hz)	100 - 240 / 50/60	
Rated power / max. current (W / A)	45 / 0.45 - 0.85 R	
Supplied plugs	US plug Nema 15	Plugs for North America, EU, China, Australia
Weight (kg / lb)	7.2 / 15.9	
Energy consumption at 37°C (W)	14	

# Heratherm General Protocol Incubators

Designed for routine applications in pharmaceutical, medical, food and research laboratories

## Intelligent design for improved results

- Gravity convection provides gentle air flow and minimal drying out
- Temperature range from ambient +5 °C up to 75 °C
- Temperature uniformity of  $\pm 0.6$  °C
- Temperature stability of  $\pm 0.2$  °C
- Corrosion resistant stainless steel chamber (AISI 430)

## Easy to use interface

- Intuitive user interface for easy temperature setting
- Large vacuum fluorescent display for easy reading
- Intuitive 24 hour timer function to program automated switch on or off



Heratherm General Protocol Microbiological Incubators, 60 L, 100 L, 180 L models



Smooth inner chamber with easy to clean rounded corners

The flexible shelf system can be removed with just a finger click to easily clean the chamber

## Specifications table/order numbers General Protocol Incubators

Order numbers	51028063	51028064	51028065
Model	IGS60	IGS100	IGS180
Convection technology	Gravity convection	Gravity convection	Gravity convection
Temperature range (°C)	ambient +5 °C to 75 °C	ambient +5 °C to 75 °C	ambient +5 °C to 75 °C
Spatial temperature deviation at 37°C	$\pm 0.6$ °C	$\pm 0.6$ °C	$\pm 0.6$ °C
Temperature deviation over time at 37°C	$\pm 0.2$ °C	$\pm 0.2$ °C	$\pm 0.2$ °C
Footprint (m <sup>2</sup> / sqft)	0.3 / 3.2	0.36 / 3.9	0.47 / 5.1
Chamber volume (L / cuft)	75 / 2.6	117 / 4.0	194 / 6.85
Interior dimensions (mm / in (W x H x D))	354 x 508 x 414 / 13.9 x 20.0 x 16.3	464 x 608 x 414 / 18.3 x 23.9 x 16.3	464 x 708 x 589 / 18.3 x 27.9 x 23
Exterior dimensions (mm / in (W x H x D)) <sup>1</sup>	530 x 755 x 565 / 20.9 x 29.7 x 22.2	640 x 855 x 565 / 25.2 x 33.7 x 22.2	640 x 955 x 738 / 25.2 x 37.6 x 29.1
Number of shelves (standard / max)	2 / 13	2 / 16	2 / 19
Max. shelf load (kg / lb)	25 / 55	25 / 55	25 / 55
Rated voltage / frequency (V / Hz)	120 / 60	120 / 60	120 / 60
Rated power / max. current (W / A)	300 / 2.5	540 / 4.5	720 / 6
Weight (kg / lb)	40 / 88	51 / 112	65 / 143
Energy consumption at 37 °C (W)	21	26	31

<sup>1</sup>Depth does not include handle/display (65mm / 2.6 in.) and distance spacer at rear (80mm / 3.1 in.); height includes the feet (35mm / 1.4 in.) NOTE: All figures in tables are typical average values for series devices, based on factory standard following norm Din12880. Please contact us for certification information or IQ/OQ documents.

# Heratherm Advanced Protocol Incubators

## Exceptional temperature performance for demanding applications

### Advanced digital timer

- Turn unit on or off at specified times
- Choose from weekly / real time / hourly settings

### Design innovation for superior results

- Dual convection for versatility of application: fan speed adjustable from 0 to 100%
- Advanced digital timer for daily or weekly on/off cycles
- Stainless steel interior (AISI 304) is easy to clean and corrosion resistant

### Advanced temperature performance

- Broad temperatures range from 5 °C above ambient to 105 °C – even suitable for drying application
- Temperature uniformity as good as  $\pm 0.2$  °C
- Temperature stability at  $\pm 0.1$  °C



Heratherm Advanced Protocol Microbiological Incubator with unique dual convection, 180 L model pictured



Heratherm Advanced Protocol incubators with internal socket for connection of electrical device (e.g. stirrer / shaker)

### Specifications table/order numbers Advanced Protocol Incubators

Order numbers	51028066	51028067	51028068
Model	IMH60	IMH100	IMH180
Convection technology	Dual convection	Dual convection	Dual convection
Temperature range (°C)	Ambient +5 °C to 105 °C	Ambient +5 °C to 105 °C	Ambient +5 °C to 105 °C
Spatial temperature deviation at 37 °C <sup>1</sup>	$\pm 0.6 / \pm 0.2$ °C	$\pm 0.6 / \pm 0.3$ °C	$\pm 0.6 / \pm 0.4$ °C
Temperature deviation over time at 37 °C	$\pm 0.1$ °C	$\pm 0.1$ °C	$\pm 0.1$ °C
Footprint (m <sup>2</sup> / sqft)	0.3 / 3.2	0.36 / 3.9	0.47 / 5.1
Chamber volume (L / cuft)	66 / 2.3	104 / 3.67	178 / 6.3
Interior dimensions (mm / in (W x H x D))	354 x 508 x 368 / 13.9 x 20.0 x 14.5	464 x 608 x 368 / 18.3 x 23.9 x 14.5	464 x 708 x 543 / 18.3 x 27.9 x 21.4
Exterior dimensions (mm / in (W x H x D)) <sup>2</sup>	530 x 755 x 565 / 20.9 x 29.7 x 22.2	640 x 855 x 565 / 25.2 x 33.7 x 22.2	640 x 955 x 738 / 25.2 x 37.6 x 29.1
Number of shelves (standard / max)	2 / 13	2 / 16	2 / 19
Max. shelf load (kg / lb)	25 / 55	25 / 55	25 / 55
Rated voltage / frequency (V / Hz)	120 / 60	120 / 60	120 / 60
Rated power / max. current (W / A)	600 / 5	840 / 7	1020 / 8.5
Weight (kg / lb)	45 / 99	56 / 123	70 / 154
Energy consumption at 37 °C (W) <sup>1</sup>	23 / 65	30 / 68	36 / 78

<sup>1</sup> Values refer to: fan off / fan full speed. <sup>2</sup> Depth does not include handle/display (65mm / 2.6 in.) and distance spacer at rear (80mm / 3.1 in.); height includes the feet (35mm / 1.4 in.) NOTE: All figures in tables are typical average values for series devices, based on factory standard following norm Din12880. Please contact us for certification information or IQ/OQ documents.

# Heratherm Advanced Protocol Security Incubators

Incorporates additional safety features for ultimate sample protection



Heratherm Advanced Protocol Security microbiological incubator with unique dual convection and additional alarm systems, 100 L unit pictured

## 140°C push button decontamination

Building on our established CO<sub>2</sub> incubator decontamination technology, introducing the first microbiological incubators with an independently certified 140 °C decontamination routine<sup>3</sup>.

## Intelligent design for improved results

- Lockable incubator door for restricted access
- Audible alarm if the door is left open accidentally

## Superior sample protection

- Automatic over and under temperature alarm



Lockable door

## 140°C decontamination

- At 140°C contaminating microorganisms are reduced to a minimum, comparable to sterilization, within a six hour cycle
- No need for separate autoclaving of interior fittings
- Certified by an accredited microbiological institute<sup>3</sup>

## Specifications table/order numbers Advanced Protocol Security Incubators

Order numbers (coated exterior / stainless steel exterior)	51028069 / 51028264	51028070 / 51028535	51028111 / 51028327
Model (coated exterior / stainless steel exterior)	IMH60-S / IMH60-S SS	IMH100-S / IMH100-S SS	IMH180-S / IMH180-S SS
Convection technology	Dual convection	Dual convection	Dual convection
Temperature range (°C)	Ambient +5 °C to 105 °C	Ambient +5 °C to 105 °C	Ambient +5 °C to 105 °C
Spatial temperature deviation at 37 °C <sup>1</sup>	± 0.6 / ± 0.2 °C	± 0.6 / ± 0.3 °C	± 0.6 / ± 0.4 °C
Temperature deviation over time at 37 °C	± 0.1 °C	± 0.1 °C	± 0.1 °C
Footprint (m <sup>2</sup> / sqft)	0.3 / 3.2	0.36 / 3.9	0.47 / 5.1
Chamber volume (L / cuft)	66 / 2.3	104 / 3.67	178 / 6.3
Interior dimensions (mm / in (W x H x D))	354 x 508 x 368 / 13.9 x 20.0 x 14.5	464 x 608 x 368 / 18.3 x 23.9 x 14.5	464 x 708 x 543 / 18.3 x 27.9 x 21.4
Exterior dimensions (mm / in (W x H x D)) <sup>2</sup>	530 x 755 x 565 / 20.9 x 29.7 x 22.2	640 x 855 x 565 / 25.2 x 33.7 x 22.2	640 x 955 x 738 / 25.2 x 37.6 x 29.1
Number of shelves (standard / max)	2 / 13	2 / 16	2 / 19
Max. shelf load (kg / lb)	25 / 55	25 / 55	25 / 55
Rated voltage / frequency (V / Hz)	120 / 60	120 / 60	120 / 60
Rated power / max. current (W / A)	1390 / 11.6	1390 / 11.6	1390 / 11.6
Weight (kg / lb)	45 / 99	56 / 123	70 / 154
Energy consumption at 37 °C (W) <sup>1</sup>	23 / 65	30 / 68	36 / 78

<sup>1</sup>Values refer to: fan off / fan full speed. <sup>2</sup> Depth does not include handle/display (65mm / 2.6 in.) and distance spacer at rear (80mm / 3.1 in.); height includes the feet here to open the parenthetical. (35mm / 1.4 in.) <sup>3</sup> Verified by independent testing facility (IBFE 9/2010). NOTE: All figures in tables are typical average values for series devices, based on factory standard following norm Din12880. Please contact us for certification information or IQ/OQ documents.

# Thermo Scientific Heratherm General Protocol Incubators

Large capacity models designed for high  
sample volume



400 L and 750 L unit available

## Efficiency

- Two sizes (400 L and 750 L)
- Gravity convection technology with unique airflow – designed for minimal drying out of samples
- Flexible shelf system for optimal use of chamber volume

## Safety

- Automatic overtemperature alarm system to protect samples – no need for timely manual setting
- Inner glass door for undisturbed viewing of samples
- Inner chambers made from corrosion-resistant stainless steel (AISI 430)
- Protect delicate samples with stable temperature conditions: uniformity of up to  $\pm 0.5^{\circ}\text{C}$  and temperature stability of  $\pm 0.4^{\circ}\text{C}$  at  $37^{\circ}\text{C}$

# Maximum convenience



Easy to view, vacuum fluorescence display with push-button simplicity



Lockable casters for easy set-up and moving



180° door opening allows convenient access to the interior for hassle free cleaning and easy loading of probes

## Features

- Large, easy-to-view, vacuum fluorescent display with simple-to-use touch button operation controlled by an onboard microprocessor
- Doors can be opened to 180° angle for easy access and use
- Stainless steel inner chamber with rounded edges for easy cleaning
- Lockable casters for easy mobility and stability
- Standard access port can be used for independent data monitoring

## Specifications table/order numbers Large capacity General Protocol Incubators

Order numbers	51029321	51029333
Model	IGS400	IGS750
Convection technology	Gravity convection	Gravity convection
Temperature range (°C)	Ambient +5 °C to 75 °C	Ambient +5 °C to 75 °C
Spatial temperature deviation at 37 °C	± 0.5 °C	± 1.3 °C
Temperature deviation over time at 37 °C	± 0.4 °C	± 0.4 °C
Footprint (m <sup>2</sup> / sqft)	0.56 / 6.0	0.91 / 9.8
Chamber volume (L / cuft)	405 / 14.3	747 / 26.4
Interior dimensions (mm / in (W x H x D))	544 x 1307 x 569 / 21.4 x 51.5 x 22.4	1004 x 1307 x 569 / 39.5 x 51.5 x 22.4
Exterior dimensions (mm / in (W x H x D)) <sup>1</sup>	778 x 1653 x 770 / 30.6 x 66 x 30.3	1261 x 1653 x 770 / 49.6 x 66 x 30.3
Number of shelves (standard / max)	2 / 39	2 / 39
Max. shelf load (kg / lb)	30 / 66	30 / 66
Rated voltage / frequency (V / Hz)	120 / 60	120 / 60
Rated power / max. current (W / A)	1080 / 9.0	1500 / 12.5
Weight (kg / lb)	145 / 320	201 / 443
Energy consumption at 37 °C (W)	55	75

<sup>1</sup>Depth does not include handle/display (65mm / 2.6 in.) and distance spacer at rear (106mm / 4.2 in.); height includes the casters (108mm / 4.3 in.) NOTE: All figures in all tables are typical average values for series devices, based on factory standard following norm Din12880. Please contact us for certification information or IQ/OQ documents.

# Heratherm Advanced Protocol Security Incubators

Mechanical convection technology provides exceptional temperature uniformity and stability to help ensure fully reproducible results. An extensive range of additional features provides even more flexibility, accuracy and dependability.



## Prime performance

- Mechanical convection technology helps ensure optimal temperature distribution with improved level of temperature uniformity:  $\pm 0.2$  to  $0.3$  °C
- Temperature range from ambient  $+5$  °C to  $105$  °C for application flexibility: units can even be used for drying applications

## Added safety

- Unique  $140$  °C decontamination cycle eliminates the need for separate autoclaving or use of toxic decontaminants
- 2-speed fan for application flexibility:
  - **Slow speed for incubation applications that require reduced drying out**
  - **High speed for best temperature uniformity and stability**
- An additional undertemp alarm provides safety even when the temperature deviates below set point
- Door alarm notifies operator if door is left open

# Additional features



Advanced protocol security units available in stainless steel exterior

Access port for independent sensor or use of shaker / stirrer inside the unit



Two speed fan for matching the airflow to your application

## Unique certified decontamination cycle

### Enhanced efficiency

- Sophisticated timer extends the automation options available to user
  - Choose between a simple on/off timer, recurring weekly timer or set incubator activity based on the 24-hour clock
- Inner chamber made from stainless steel (highly resistant quality 1.4301)



### Specifications table/order numbers Large Capacity Advanced Protocol Security Incubators

Order numbers (coated exterior / stainless steel exterior)	51029323 / 51029324	51029335 / 51029324
Model (coated exterior / stainless steel exterior)	IMH400-S / IMH400-S SS	IMH750-S / IMH750-S SS
Convection technology	Mechanical convection	Mechanical convection
Temperature range (°C)	Ambient +5 °C to 105 °C	Ambient +5 °C to 105 °C
Spatial temperature deviation at 37 °C	± 0.2 °C	± 0.3 °C
Temperature deviation over time at 37 °C	± 0.2 °C	± 0.2 °C
Footprint (m <sup>2</sup> / sqft)	0.56 / 6.0	0.91 / 9.8
Chamber volume (L / cuft)	381 / 13.5	702 / 24.8
Interior dimensions (mm / in (W x H x D))	544 x 1335 x 524 / 21.4 x 52.6 x 20.6	1004 x 1335 x 524 / 39.5 x 52.6 x 20.6
Exterior dimensions (mm / in (W x H x D)) <sup>1</sup>	778 x 1653 x 770 / 30.6 x 66 x 30.3	1261 x 1653 x 770 / 49.6 x 66 x 30.3
Number of shelves (standard / max)	2 / 39	2 / 39
Max. shelf load (kg / lb)	30 / 66	30 / 66
Rated voltage / frequency (V / Hz)	120 / 60	120 / 60
Rated power / max. current (W / A)	1380 / 11.5	1560 / 13
Weight (kg / lb)	144 / 318	205 / 452
Energy consumption at 37 °C (W)	87	149

<sup>1</sup>Depth does not include handle/display (65mm / 2.6 in.) and distance spacer at rear (106mm / 4.2 in.); height includes the casters (108mm / 4.3 in.) NOTE: All figures in all tables are typical average values for series devices, based on factory standard following norm Din12880. Please contact us for certification information or IQ/OQ documents.

# Stainless steel exterior

An optional stainless steel exterior is available for the Heratherm Advanced Protocol Security Microbiological Incubator models



## Maximized performance

- Robust and corrosion-resistant surface
- Easy to clean
- Meets demanding needs in pharmaceutical and clinical laboratories



# Proven results

Heratherm Microbiological Incubators offer exceptional data monitoring systems that provide the key to reliable results

## Unique optional sample sensor for Advanced Protocol Security models



- Measure exact sample temperature, shown on display in addition to chamber temperature
- Additional peace-of-mind for safety of your precious samples
- Easy connection at rear of unit

## Data monitoring capabilities

- All models have an access port
  - Ideal for insertion of an independent sample temperature sensor, for Good Laboratory Practice (GLP) compliance
  - Large diameter of 42 / 1.65 (38 / 1.1)\* mm/inches fits standard plug
  - Covered by stopper to prevent any temperature disturbance
- All models incorporate a standard RS232 interface
- Advanced Protocol Security models include a socket for independent sample sensor (option) when connected, exact sample temperature is shown on display



RS232 standard on all General Protocol, Advanced Protocol and Advanced Protocol Security models/sizes

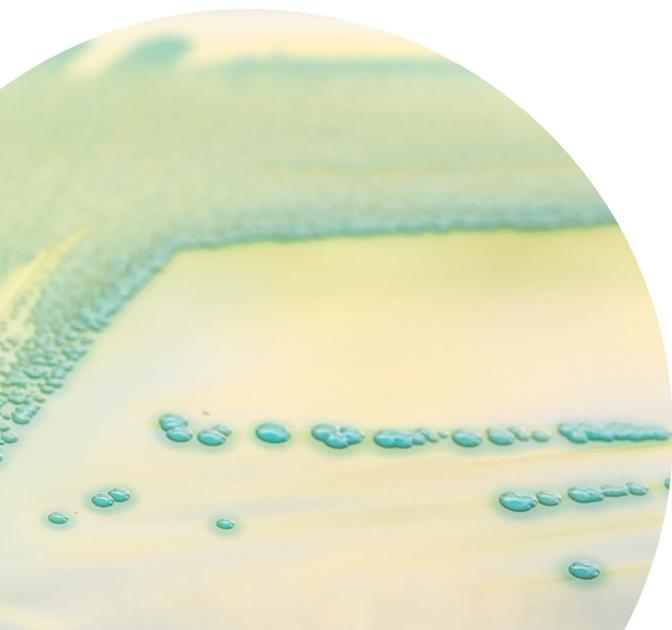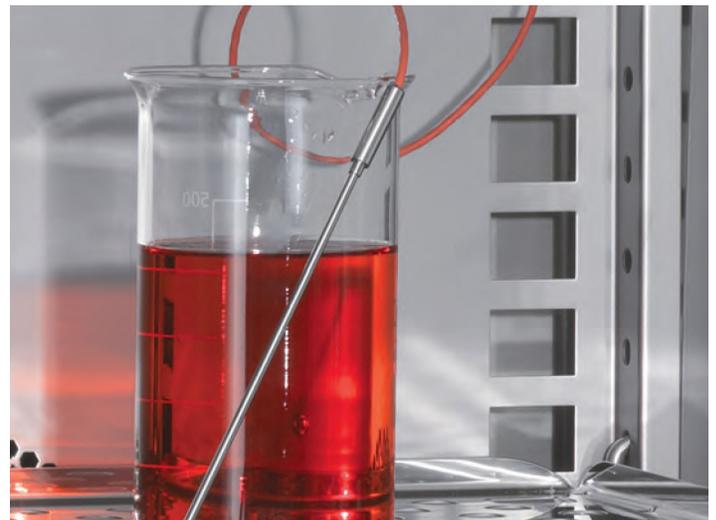

# Accessories

## Specifications table/order numbers

Product	Description	Cat. No.
<b>Perforated shelves</b>		
Compact	Stainless steel perforated shelf for Compact incubator; 7.1 x 11.4 in	50125605
Perforated shelf General Protocol 60 L	Stainless steel perforated shelf for General Protocol 60 L; including 2 shelf supports; 12.95 x 14.80 in	50127770
Perforated shelf General Protocol 100 L	Stainless steel perforated shelf for General Protocol 100 L; including 2 shelf supports; 12.95 x 14.80 in	50127771
Perforated shelf General Protocol 180 L	Stainless steel perforated shelf for General Protocol 180 L; including 2 shelf supports; 12.95 x 12.99 in	50127772
Perforated shelf Advanced Protocol / Security 60 L	Stainless steel perforated shelf for Advanced Protocol / Advanced Protocol Security; 60 L; incl. 2 shelf Advanced Protocol supports; 12.95 x 12.99 in	50127773
Perforated shelf Advanced Protocol / Security 100 L	Stainless steel perforated shelf for Advanced Protocol / Advanced Protocol Security; 100 L; including 2 shelf Advanced Protocol / supports; 17.28 x 12.99 in	50127774
Perforated shelf Advanced Protocol / Security 180 L	Stainless steel perforated shelf for Advanced Protocol / Advanced Protocol Security; 180 L; including 2 shelf Advanced Protocol / supports; 17.28 x 19.88 in	50127777
Perforated shelf 400 L	Stainless steel perforated shelf for General Protocol / Advanced Protocol Security 400 L; incl. 2 shelf supports; 20.79 x 19.61 in	50135241
Perforated shelf 750 L	Stainless steel perforated shelf for General Protocol / Advanced Protocol Security 750 L; including 2 shelf supports; 38.74 x 19.61 in	50135242
<b>Additional shelving</b>		
Wire mesh shelf 60 L	Wire mesh shelf for Advanced Protocol / Advanced Protocol Security; 60 L; incl. 2 shelf supports; 13.31 x 13.22 in	50127764
Wire mesh shelf 100 L	Wire mesh shelf for Advanced Protocol / Advanced Protocol Security; 100 L; incl. 2 shelf supports; 17.64 x 13.22 in	50127765
Wire mesh shelf 180 L	Wire mesh shelf for Advanced Protocol / Advanced Protocol Security; 180 L; incl. 2 shelf supports; 17.64 x 20.12 in	50127766
Wire mesh shelf 400 L, GP	Wire mesh shelf for General Protocol; 400 L; incl. 2 shelf supports; 20.79 x 21.06 in	50135245
Wire mesh shelf 400 L, APS	Wire mesh shelf for Advanced Protocol Security; 400 L; incl. 2 shelf supports; 20.79 x 19.8 in	50135243
Wire mesh shelf 750 L, GP	Wire mesh shelf for General Protocol; 750 L; incl. 2 shelf supports; 38.74 x 21.06 in	50135246
Wire mesh shelf 750 L, APS	Wire mesh shelf for Advanced Protocol Security; 750 L; including 2 shelf supports; 38.74 x 19.8 in	50135244



Stainless steel perforated shelves

# Accessories continued

## Specifications table/order numbers

Product	Description	Cat. No.
<b>Additional shelving continued</b>		
Petri Dish holder (3.54 in) 60 L	Shelf with holders for petri dishes; ø 3.54 in; stainless steel; for all 60 L incub.; incl. 2 shelf supports; 9 stacks; 3.1 in (h)	50128816
Petri Dish holder (3.54 in) 100 L	Shelf with holders for petri dishes; ø 3.54 in; stainless steel; for all 100 L incub.; incl. 2 shelf supports; 12 stacks; 3.1 in (h)	50128817
Petri Dish holder (3.54 in) 180 L	Shelf with holders for petri dishes; ø 3.54 in; stainless steel; for all 180 L incub.; incl. 2 shelf supports; 16 stacks; 3.1 in (h)	50128819
Petri Dish holder (1.97 in) 60 L	Shelf with holders for petri dishes; ø 1.97 in; stainless steel; for all 60 L incub.; incl. 2 shelf supports; 20 stacks; 3.1 in (h)	50128793
Petri Dish holder (1.97 in) 100 L	Shelf with holders for petri dishes; ø 1.97 in; stainless steel; for all 100 L incub.; incl. 2 shelf supports; 24 stacks; 3.1 in (h)	50128794
Petri Dish holder (1.97 in) 180 L	Shelf with holders for petri dishes; ø 1.97 in; stainless steel; for all 180 L incub.; incl. 2 shelf supports; 36 stacks; 3.1 in (h)	50128815
Drip Tray 60 L	Stainless steel drip tray for all 60 L incubators; includes 2 shelf supports; 11.61 x 12.8 x 0.79 in drip space	50128683
Drip Tray 100 L	Stainless steel drip tray for all 100 L incubators; includes 2 shelf supports; 11.94 x 12.8 x 0.79 in drip space	50128791
Drip Tray 180 L	Stainless steel drip tray for all 180 L incubators; includes 2 shelf supports; 15.94 x 19.69 x 0.79 in drip space	50128792
Lowenstein kit	Lowenstein kit 5.9 in. tubes; 2 trays to place on top of perforated shelf (shelf not supplied); 17.1 x 6.1 in; 20 tubes each tray. Usable for 100 L models and larger	50128265
<b>Silicone free viton door sealing</b>		
Silicone free viton sealing 60 L	Silicone free viton door sealing for all 60 L incubators	50130657
Silicone free viton sealing 100 L	Silicone free viton door sealing for all 100 L incubators	50130658
Silicone free viton sealing 180 L	Silicone free viton door sealing for all 180 L incubators	50130659
Silicone free viton door sealing, 400L & 750L	Factory installed silicone free viton door sealing. Please order with 400L or 750L incubator. Note: The sealing cannot be installed in the field on these free standing 400L and 750 L units.	51901344



Drip tray



Lowenstein shelves



Silicone free viton door sealing



Petri dish holder

# Accessories continued

## Specifications table/order numbers

Product	Description	Cat. No.
<b>Sample Sensor</b>		
Sample sensor	Sample sensor for connection to all Advanced Protocol Security incubators: measures exact sample temperature; sample temperature is shown on display as plugged in; cable length: 86.6 in	50127768
<b>Support replace stands</b>		
Support stand 60 L	Support stand with casters for 60 L models; height including casters 7.36 in	50127741
Support stand 100 L	Support stand with casters for 100 L models; height including casters 7.36 in	50127742
Support stand 180 L	Support stand with casters for 180 L models; height including casters 7.36 in	50127743
<b>Stacking kits: recommended if decon cycle is performed in lower unit</b>		
Stacking kit 60 L	Stacking kit for 60 L / 2 cu.ft. models	50126665
Stacking kit 100 L	Stacking kit for 100 L / 3.5 cu.ft. models to stack two 100 L models or 60 L on 100 L	50126666
Stacking kit 180 L	Stacking kit for 180 L / 6.4 cu.ft. models to stack two 180 L models or 60 L / 100 L on 180 L	50126667
<b>Fresh air particle filter</b>		
Fresh air particle filter	Fresh air particle filter for connection to port; for all Advanced Protocol and Advanced Protocol Security incubators.	50127567
<b>Documentation</b>		
IQ/OQ documentation	Documents for installation, operation and performance qualification of microbiological incubators.	IOQDOCE89003499



Stacking kit



Support stand with casters




Fresh air particle filter

# Factory installed options

## Specifications table/order numbers

Product	Description	Cat. No.
Access port left, small	Additional access port on center of left side of unit; Ø 0.94 in for all incubators	51900996
Access port left, large	Additional access port on center of left side of unit; Ø 2.28 in for all incubators	51900997
Access port right, small	Additional access port on center of right side of unit; Ø 0.94 in for all incubators	51900998
Access port right, large	Additional access port on center of right side of unit; Ø 2.28 in for all incubators	51900999
Access port top, small	Additional access port on center of top of unit; Ø 0.94 in for all incubators	51901000
Access port top, large	Additional access port on center of top of unit; Ø 2.28 in for all incubators	51901001
Door hinge left side - table top	Door hinge on left side - Available for General Protocol; Advanced Protocol and Advanced Protocol Security units. 60 / 100 /180 L table top, coated exterior only. Please order in conjunction with desired incubator	51900993
Door hinge left side - 400L	Door hinge on left side - Available for General Protocol and Advanced Protocol Security units. 400L floor stand, coated exterior only. Please order in conjunction with desired incubator	51901213

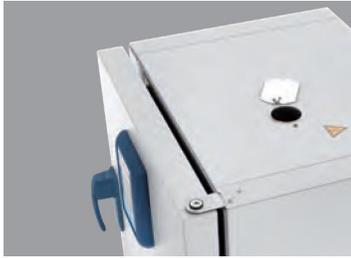

Additional access port top



Additional access port right

# Heratherm Microbiological Incubators


## Thermo Scientific™ Smart-Vue™ Pro Remote Monitoring Solution

### Smart, scalable and simple

- Continuously monitors sample environment
- Secure data logging with real-time alarm
- Audit trail traceability to assist with conformance to 21 CFR Part 11

To learn more, visit  
[thermofisher.com/smart-vuepro](http://thermofisher.com/smart-vuepro)

Solutions vary by RF regions worldwide and are compatible with multiple brands and types of laboratory equipment. Contact your local sales representative for more details.

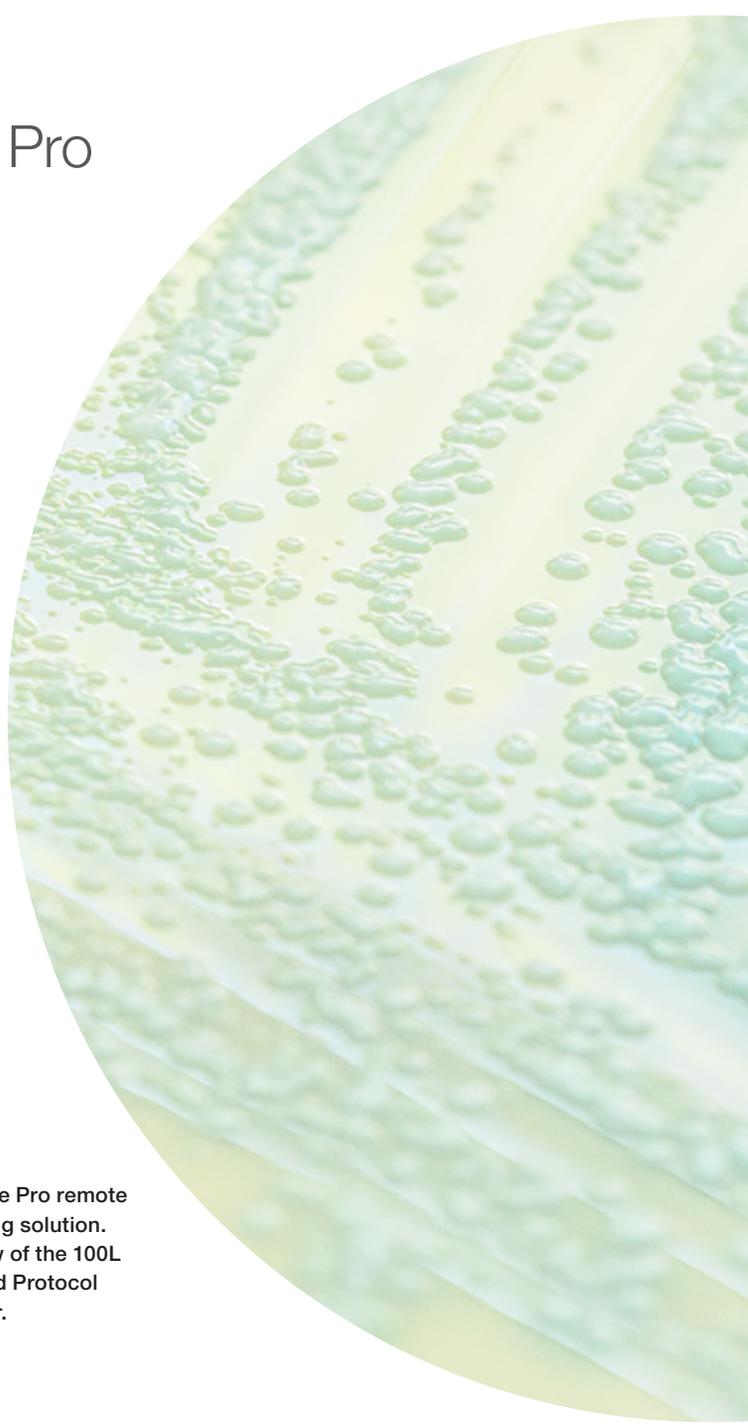

Smart Vue Pro remote monitoring solution. Rear view of the 100L Advanced Protocol Incubator.

Learn more at [thermofisher.com/incubators](http://thermofisher.com/incubators)

**thermo** scientific