

# Thermo Scientific PXS5 Microfocus X-ray Sources

Thermo Scientific<sup>™</sup> PXS5 Microfocus X-ray Sources provide a cost-efficient solution for applications in which lower voltages can deliver the performance required. Primary applications include electronic component inspection, for example for PCBs and semi-conductor devices, and dental imaging - applications where small, relatively thin structures give rise to low attenuation levels. More generally, PXS5 sources find application in other areas of AXI (automated X-ray inspection), high resolution non-destructive testing and for micro-CT (micro computed tomography). Integrated 80 and 90 kV designs include options for side window configuration and digital interfacing to provide the flexibility required for individual applications, even when space is restricted. All PXS5 sources are specified for high resolution, high magnification, and enduring stability.



#### Key features

- Small, round spot: to produce high-resolution, low distortion, high quality images
- Short FOD (focal object distance): to deliver excellent geometric magnification and short image acquisition times
- **High-flux and spot location stability:** to ensure consistent high-quality imaging with minimal temporal variation
- Automatic source conditioning: to minimize the risk of damage as the source comes up to operating conditions
- Digital or analog interface options: to enable easy operation and optimal on-going performance across a range of applications
- Fully integrated design: to reduce space requirements, with xray tube, high-voltage power supply, and controller in a single package powered from a 12 VDC source
- No high voltage cable required: high voltage power supply integrated
- Side window configuration available: to enable use in smaller cabinet systems and installation flexibility

Note: the three options in PXS5 source vary in respect to different combinations of key features. Individual detailed specifications for the PXS5-822, PXS5-925 and PXS5-928 sources are included for reference.


#### PXS5-928 X-ray Source

# thermo scientific

#### **Specifications**

PXS5-822 X-ray Source	
Maximum tube voltage	80kV
Operating voltage range	20-80 kV
Tube current operational range	0–178µA
Maximum power output	8W
Minimum focal spot size	15µm
X-ray beam angle	34°, round beam
Focus to object distance (FOD)	12.5±0.5mm
Target material	Tungsten
X-ray output window material	Beryllium
Weight	3.6 kg
Ambient temperature and humidity	0-32 °C, 0-95% RH, up to 1,500 m (5,000 ft) altitude
Method of cooling	Internal fan. Adequate air circulation around unit must be provided
Input power	12–14 VDC, 4A max measured at source
Control interface	Analog control and monitoring of operating conditions and status


### Outline drawing of PXS5-822 X-ray Source

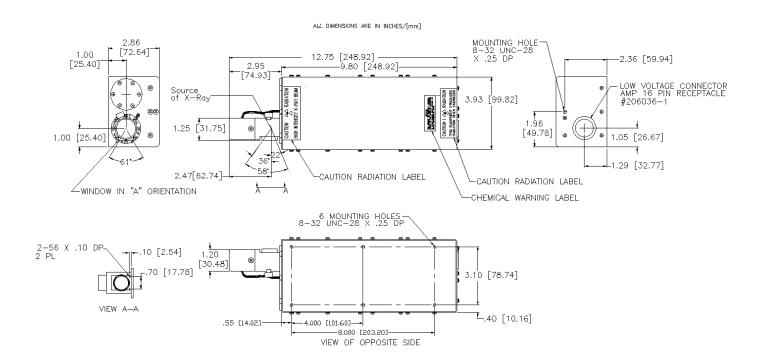

#### **Specifications**

PXS5-925 X-ray Source	
Maximum tube voltage	90 kV
Operating voltage range	20-90 kV
Tube current operational range	0-180μΑ
Maximum power output	8W
Minimum focal spot size	5µm
X-ray beam angle	40°, round beam
Focus to object distance (FOD)	12.0±0.5mm
Target material	Tungsten
X-ray output window material	Beryllium
Weight	3.6kg
Ambient temperature and humidity	0-32 °C, 0-95% RH, up to 1,500 m (5,000 ft) altitude
Method of cooling	Internal fan. Adequate air circulation around unit must be provided
Input power	12–14 VDC, 4A max measured at source
Control interface	Digital RS-232C or analog control and monitoring of operating conditions and status

### Outline drawing of PXS5-925 X-ray Source

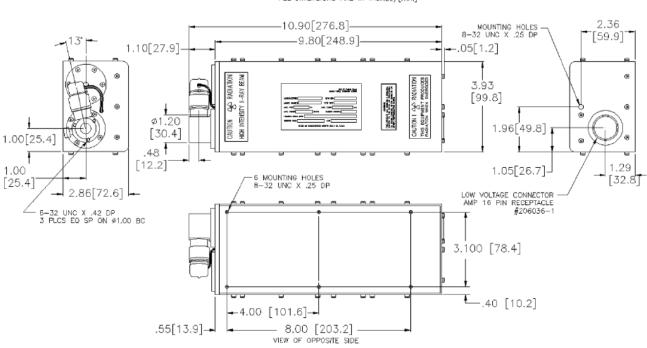


ALL DIMENSIONS ARE IN INCHES/[mm]

#### Specifications

PXS5-928 X-ray Source	
Maximum tube voltage	90 KV
Operating voltage range	20-90 kV
Tube current operational range	0–160µA
Maximum power output	8W
Minimum focal spot size	4.5 µm
X-ray beam angle	108°
Focus to object distance (FOD)	6.0 mm
Target material	Tungsten
X-ray output window material	Beryllium
Weight	3.6 kg
Ambient temperature and humidity	0–32 °C, 0–95% RH, up to 1,500 m (5,000 ft) altitude
Method of cooling	Internal fan. Adequate air circulation around unit must be provided
Input power	12–14 VDC, 4A max measured at source
Control interface	Digital RS-232C or analog control and monitoring of operating conditions and status

## Outline drawing of PXS5-928 X-ray Source

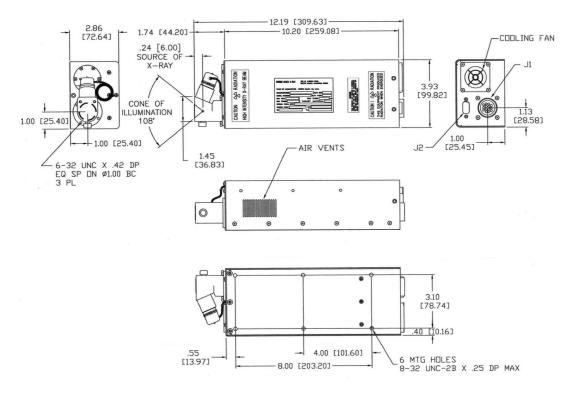

Learn more at thermofisher.com/xraysources

# thermo scientific

© 2022-2024 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific and its subsidiaries unless otherwise specified. **PPA-PS1206-EN 10/24**